




Description

The ladder is made with aluminum frames and aluminum anti-slip steps. On request, it can be supplied with galvanized iron spikes instead of the rubber feet at the base of the three frames, in order to increase the grip on uneven or sloping grounds. It is light, practical and durable and it is suitable for intensive use.


STEPS: WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)
STEPS: aluminum 35x24 mm
FRAMES: anodized aluminum 65x30 mm
SAFETY STANDARD:
D. Lgs. n° 81/2008

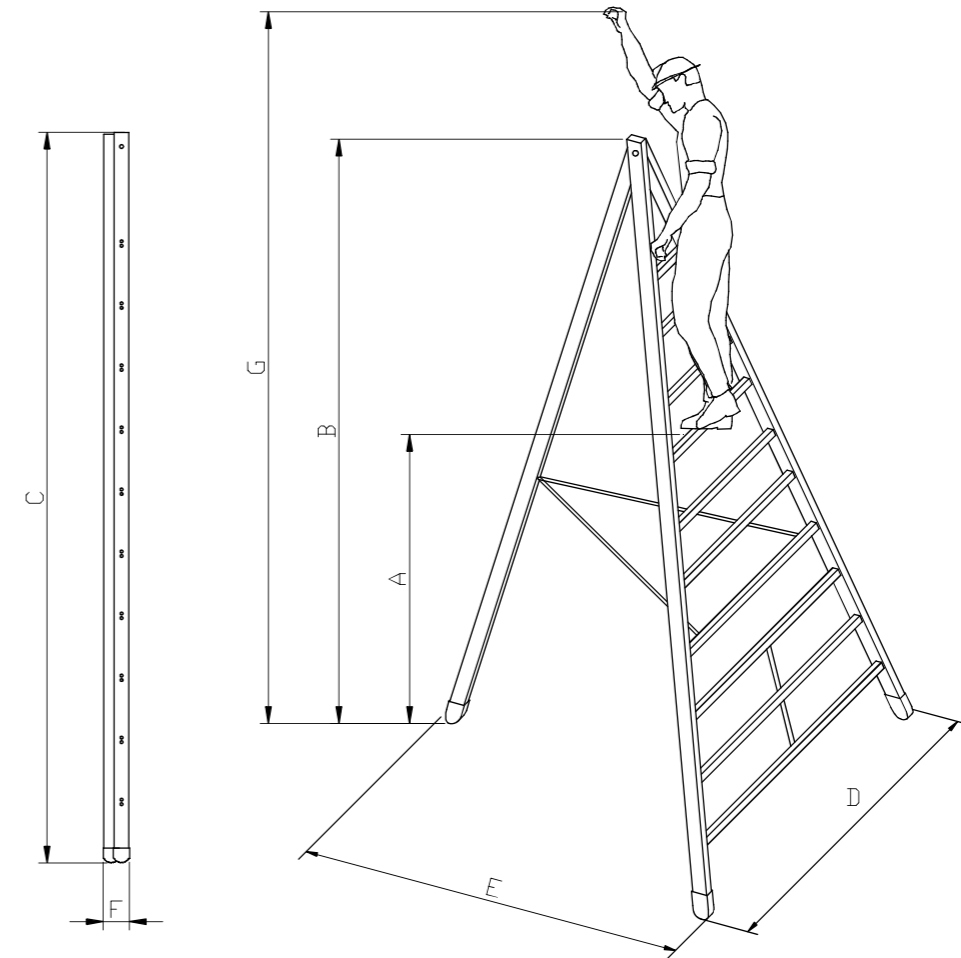

Code	Steps	A	B	C	D	E	F	G	Weight
S6006	6	1070	2050	2160	870	1380	140	2920	11 kg
S6008	8	1590	2580	2720	1060	1770	140	3440	13 kg
S6010	10	2110	3110	3280	1260	2150	140	3960	15 kg
S6012	12	2640	3640	3840	1320	2540	140	4490	18 kg
S6014	14	3160	4170	4400	1500	2930	140	5000	21 kg

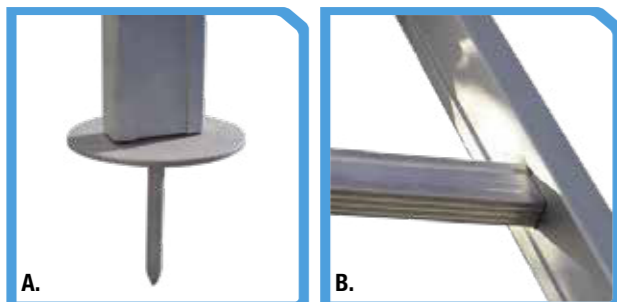

A. Galvanized iron spike
B. Step particular

Measures are in mm