





Description

The ladder is made with aluminum frames and aluminum anti-slip steps. Thanks to its symmetric measures and to the rubber feet in both ends of the frames, the ladder can be used in both directions.



STEPS: WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)
STEPS: aluminum 35x24 mm
FRAMES: anodized aluminum 65x30 mm
TOP WIDTH: 415 mm
SAFETY STANDARD:
D. Lgs. n° 81/2008



A. Step fixing
B. Foot detail

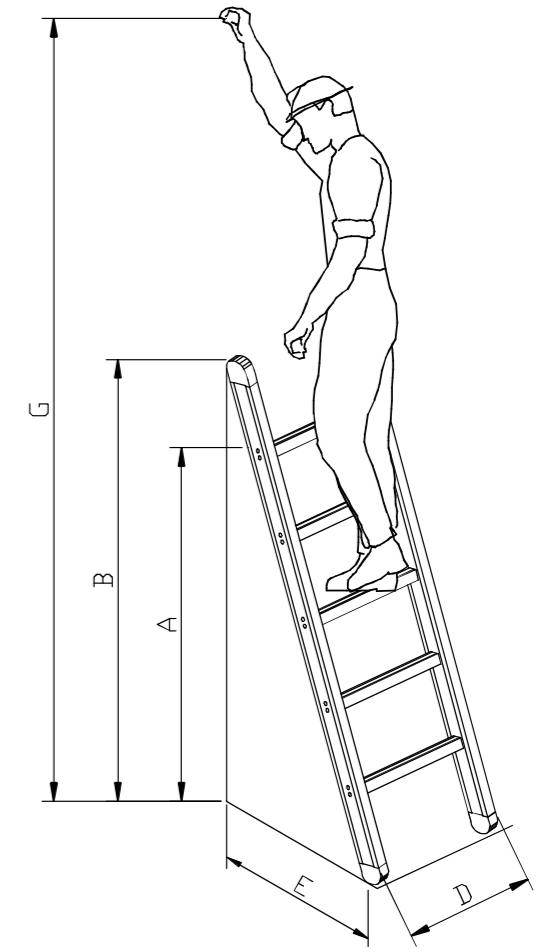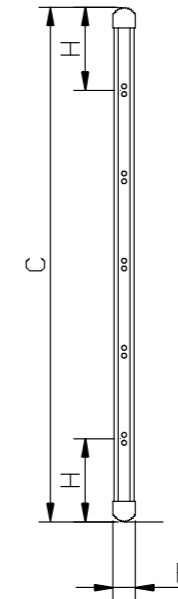

Code	Steps	A	B	C	D	E	F	G	H	Weight
S2004	4	1060	1295	1375	415	485	72	2360	270	4,1 kg
S2005	5	1325	1560	1655	415	580	72	2625	270	4,9 kg
S2006	6	1590	1825	1935	415	675	72	2890	270	5,7 kg
S2007	7	1855	2090	2215	415	770	72	3155	270	6,5 kg
S2008	8	2120	2355	2495	415	865	72	3420	270	7,3 kg
S2009	9	2385	2620	2775	415	960	72	3685	270	8,1 kg
S2010	10	2650	2885	3055	415	1055	72	3950	270	8,9 kg

Measures are in mm