



**Description**

The ladder is made of aluminum and it has anodized aluminum frames and anti-slip steps. It is constructed without welding and composed by 2 or 3 elements. It can be used also as a stepladder. This ladder is equipped with stabilizer bar and anti-opening device. **N.B.** Safety sleeve is compulsory over 8 m (according to D. Lgs. n° 81/2008)

**STEPS: WELD FREE AND RIVETING FREE**

**Technical Data**

**WEIGHT CAPACITY:** 150 kg (weight related to a person with tools)  
**STEPS:** aluminum 35x24 mm  
**FRAMES:** anodized aluminum 68x30 mm  
**BASE ELEMENT DIMENSION:**  
 • With closed bar: 700 mm  
 • With opened bar: 1150 mm  
**ELEMENTS WIDTH:**  
 • Middle: 475 mm  
 • Final: 410 mm  
**SAFETY STANDARD:**  
 UNI EN 131-2;  
 D. Lgs. n° 81/2008 for S1014

Possibility of receiving the product in two or three elements




A. Anti-opening device  
 B. Anti-release device  
 C. Stabilizer bar detail



Code	Steps	Ladder Elements	Height to Book	Extension Height	Tot. Closed Height	Weight
S0908	8	2	2310	4100	2420	21 kg
S0910	10	2	2840	5220	2980	26 kg
S0912	12	2	3380	6340	3540	32 kg
S0914	14	2	3920	7460	4100	37 kg
S1008	8	3	3160	5890	2520	30 kg
S1010	10	3	3700	7570	3080	37 kg
S1012	12	3	4240	9220	3640	44 kg
S1014*	14	3	4770	10900	4200	51 kg

\* Complying with D.Lgs. n° 81/2008 - Measures are in mm

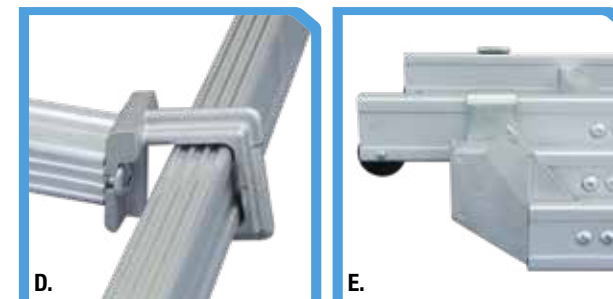

D. Anti-opening device  
 E. Elements joint