




Description

The ladder has a single climb ramp, with double tube in steel and anti-slip aluminum steps. It is equipped with a comfortable guard rail which is 750 mm high.



STEPS: WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)
PLATFORM: anti-slip aluminum
270x260 mm
STEPS: aluminum 95x23 mm
FRAMES: steel, double section
ø 15 mm
TOP WIDTH: 260 mm
SAFETY STANDARD:
D. Lgs. n° 81/2008

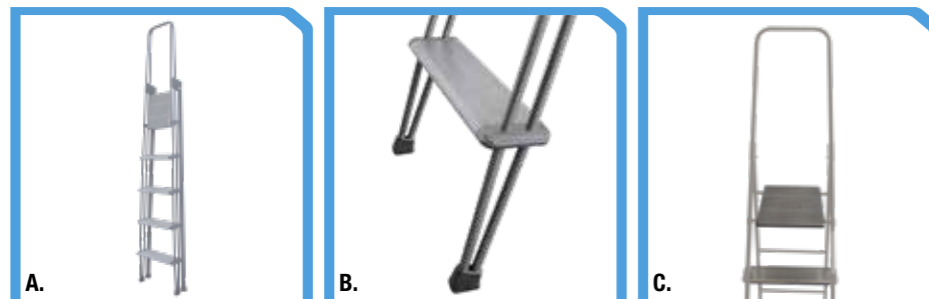

A. Ladder in resting position
B. Feet and step detail
C. Guard rail

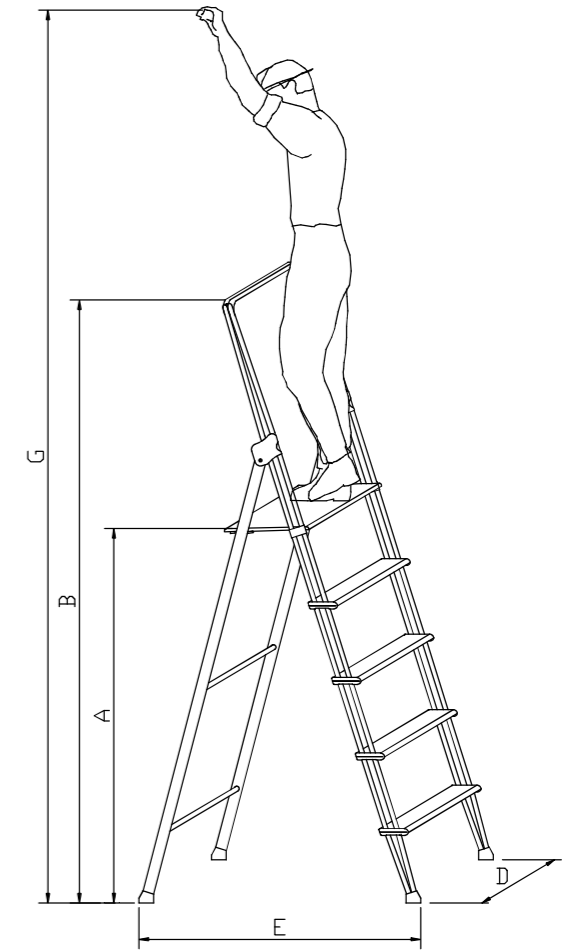

Code	Steps*	A	B	C	D	E	F	G	Weight
S0404	4	960	1680	1760	440	800	130	2850	8,8 kg
S0405	5	1200	1910	2010	460	950	130	3100	10 kg
S0406	6	1440	2150	2260	480	1100	130	3350	11,4 kg
S0407	7	1680	2400	2510	500	1230	130	3600	12,8 kg
S0408	8	1910	2630	2800	520	1400	130	3850	14,2 kg
S0409	9	2150	2870	3050	540	1540	130	4100	15,6 kg
S0410	10	2390	3110	3260	560	1690	130	4350	17,2 kg
S0411	11	2630	3360	3510	580	1840	130	4600	18,6 kg
S0412	12	2860	3590	3760	600	2020	130	4850	20,4 kg

* The platform is included in the number of steps - Measures are in mm