



Description


The ladder has a single climb ramp. It is made of aluminum with anodized aluminum frames and anti-slip steps. It is light, practical, durable and particularly suitable for professional use. It provides to operator an excellent comfort. It is equipped with a convenient guard rail with height of 640 mm.

STEPS: they are mounted on aluminum die-casted supports with rungs and anti-torsion groove and they are fixed onto the frames.



WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)
PLATFORM: anti-slip aluminum
270x260 mm
STEPS: aluminum 95x23 mm
FRAMES: anodized aluminum 42x22 mm
OBJECTS HOLDER: nylon tray
TOP WIDTH: 320 mm
SAFETY STANDARD:
UNI EN 131-2




A. Objects holder and platform
B. Die casted hinge
C. Different heights

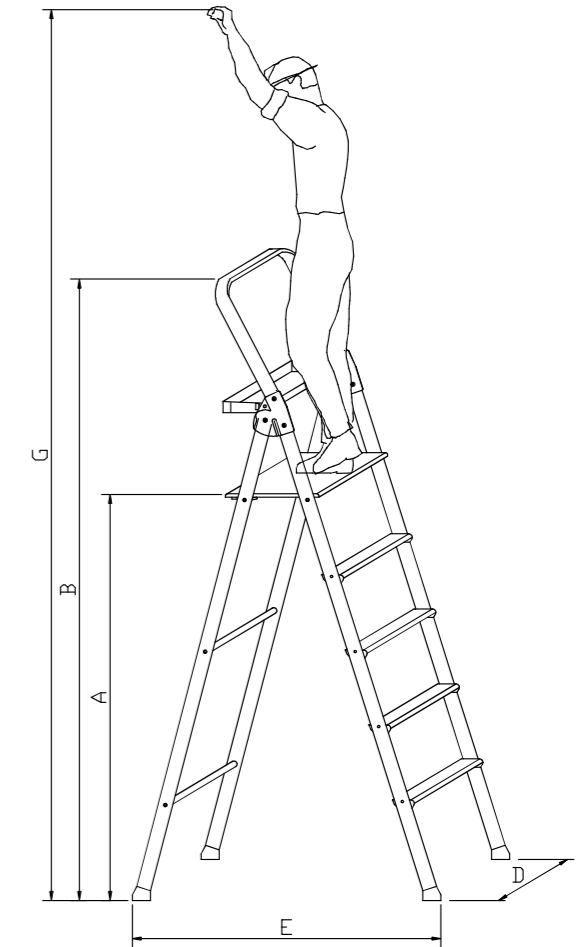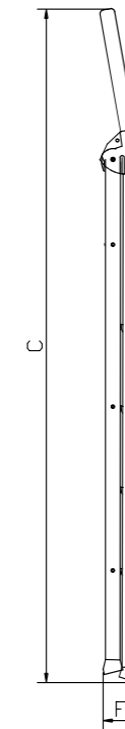

Code	Steps*	A	B	C	D	E	F	G	Weight
S0603	3	720	1360	1470	450	750	130	2570	5,5 kg
S0604	4	960	1600	1720	475	910	130	2810	6,5 kg
S0605	5	1200	1840	1970	500	1070	130	3050	8 kg
S0606	6	1440	2080	2220	525	1230	130	3290	9 kg
S0607	7	1680	2320	2470	550	1390	130	3530	10 kg
S0608	8	1920	2560	2720	575	1550	130	3770	11 kg

* The platform is included in the number of steps - Measures are in mm



D. Ladder in resting position