



Description

The ladder has two climb ramps and it is very solid. It has anodized aluminum frames and anti-slip aluminum steps. It is practical and durable and it provides to operator an excellent comfort.

STEPS: they are mounted on aluminum die-casted supports with rungs and anti-torsion groove and they are fixed onto the frames.

WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)

STEPS: aluminum 95x23 mm

FRAMES: aluminum 65x30 mm



HINGE JOINT: galvanized steel

TOP WIDTH: 400 mm



SAFETY STANDARD:

UNI EN 131-2


D. Lgs. n° 81/2008 for S1122-24

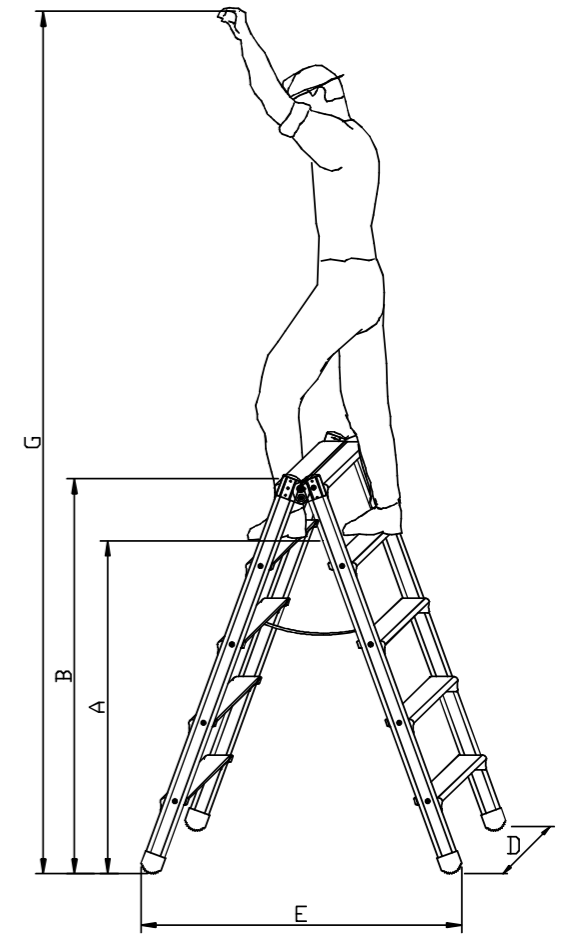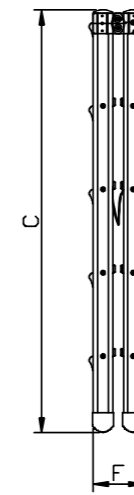

Code	Steps	A	B	C	D	E	F	G	Weight
S1108	4+4	790	1100	1140	530	860	200	2550	9 kg
S1110	5+5	1050	1360	1420	560	1050	200	2810	11 kg
S1112	6+6	1320	1630	1700	590	1210	200	3080	13 kg
S1114	7+7	1590	1900	1980	620	1370	200	3350	15,2 kg
S1116	8+8	1850	2160	2260	650	1570	200	3610	17,4 kg
S1118	9+9	2120	2430	2540	680	1760	200	3880	19,6 kg
S1120	10+10	2380	2690	2820	710	1920	200	4140	21,8 kg
S1122*	11+11	2640	2950	3100	740	2110	200	4400	24 kg
S1124*	12+12	2900	3210	3380	770	2300	200	4660	26 kg



A. Different heights
B. Anti-slip rubber caps
C. Anti-opening hinge



* Complying with D. Lgs. n° 81/2008
Measures are in mm

D. Anti-opening tape