



## Description

The ladder is made of stainless steel and the steps of anti-slip aluminum. The ladder is provided with handrail. The standard model has two fixed rear wheels and you can easily move it by lifting the front part.

It is also available on request the ladder SG/P version, which is supplied with two fixed rear wheels and two front rotating wheels with spring. With this version the ladder can be easily moved only by pushing it and the front wheels will be blocked by the weight of the operator while using the ladder.

**STEPS:** they are mounted on aluminum die-casted supports with rungs and anti-torsion groove and they are fixed onto the frames.

**WELD FREE AND RIVETING FREE**

## Technical Data

**WEIGHT CAPACITY:** 150 kg  
(weight related to a person with tools)

**FRAMES:** stainless steel  
(60x20 mm + 40x20 mm + 30x15 mm)

**PLATFORM:** anti-slip aluminum  
450x340 mm


**WHEELS:** rear wheels ø 140 mm  
(front wheels SG/P ø 100 mm)

**STEPS:** aluminum 150x23 mm

**TOP WIDTH:** 450 mm

**SAFETY STANDARD:**

UNI EN 131-2 , UNI EN 14183

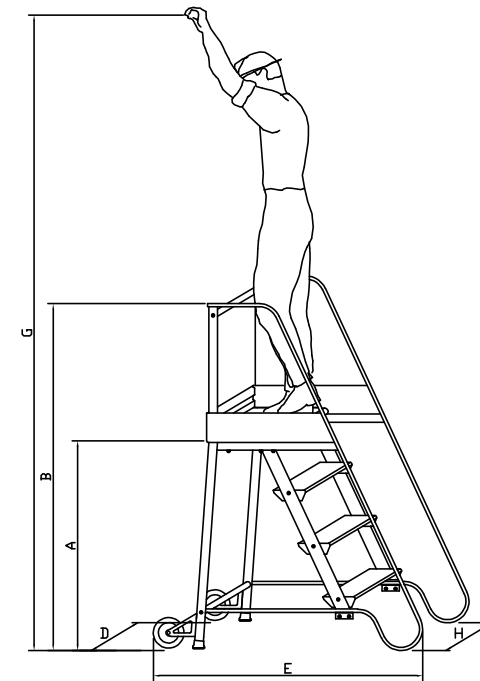

Code	Steps*	A	B	D	E	H	G	Weight
S0302AS	2	500	1120	500	960	510	2350	14,3 kg
S0303AS	3	750	1360	520	1100	530	2600	17,2 kg
S0304AS	4	1000	1600	550	1230	550	2850	20,2 kg

To optimize transport the ladder can be supplied disassembled



A. Joint and rotating wheel  
B. Wheel holder kit  
C. Anti-torsion supports

\* The platform is included in the number of the steps  
Measures are in mm