


Description

It is a very solid multiuse ladder with two climb ramps. It has aluminum sides and anti-slip aluminum steps. It is particularly suitable for professional use; it is practical and light and it provides to operator an excellent comfort. It can be used as support ladder, as tripod ladder and as lame ladder (2 different base surfaces). The ladder has a stabilizer bar.

Steps: anti-slip aluminum pegs.


Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)
STEPS: anti-slip aluminum 30x30mm
SIDES:
• Upper side 68x25mm
• Lower side 77x26mm
HINGES: lamellar hing
SAFETY STANDARD:
UNI EN 131-1, UNI EN 131-4

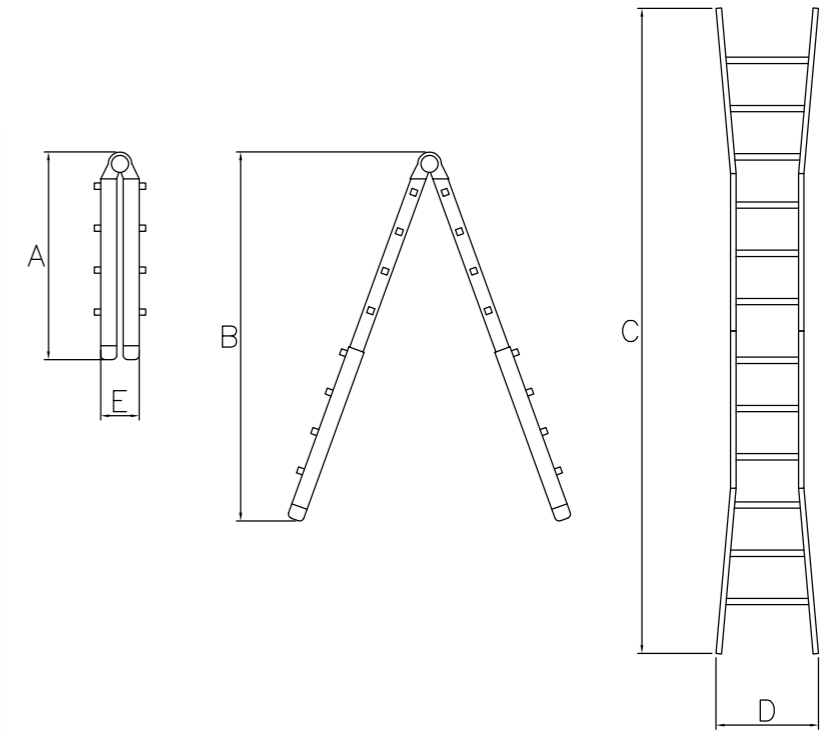

Code	Steps	A	B	C	D	E	Weight
ST0012	3x4	990	1550	3080	500	200	9,6 kg
ST0016	4x4	1290	2050	4280	630	200	12,4 kg
ST0020	5x4	1590	2650	5480	630	200	14,9 kg
ST0024	6x4	1890	2950	6080	660	200	17,2 kg

Measures are expressed in mm
Measures "D" with stabilizer bar mounted is 915 mm

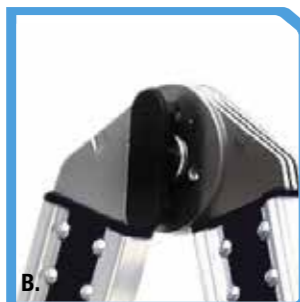

- A. Accessory for inclined bases
- B. Hinge
- C. Anti -slip rubber cap
- D. Stabilizer bar

