



Description

The ladder is made of stainless steel and it is equipped with handrail. Platforms and steps are in anti-slip aluminum.

It is available in two versions:

- **S2P/A** (from 6 to 12 steps) four rotating wheels with brake lever.
- **S2P/F** (from 6 to 12 steps) four ground fixing plates

WARNING: with version S2P/A the user must activate the brake pedal before using the ladder.

Steps: they are mounted on aluminum die-casted supports with rungs and anti-torsion groove and they are fixed onto the frames.

WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)

FRAMES: stainless steel
(40x20, 60x20, 20x20 mm)


PLATFORMS: anti-slip aluminum
700x340 mm

WHEELS: rotating wheels with brake lever
Ø 125mm

STEPS: aluminum 150x23 mm


TOP WIDTH: 700 mm

SAFETY STANDARD: D. Lgs. n° 81/2008

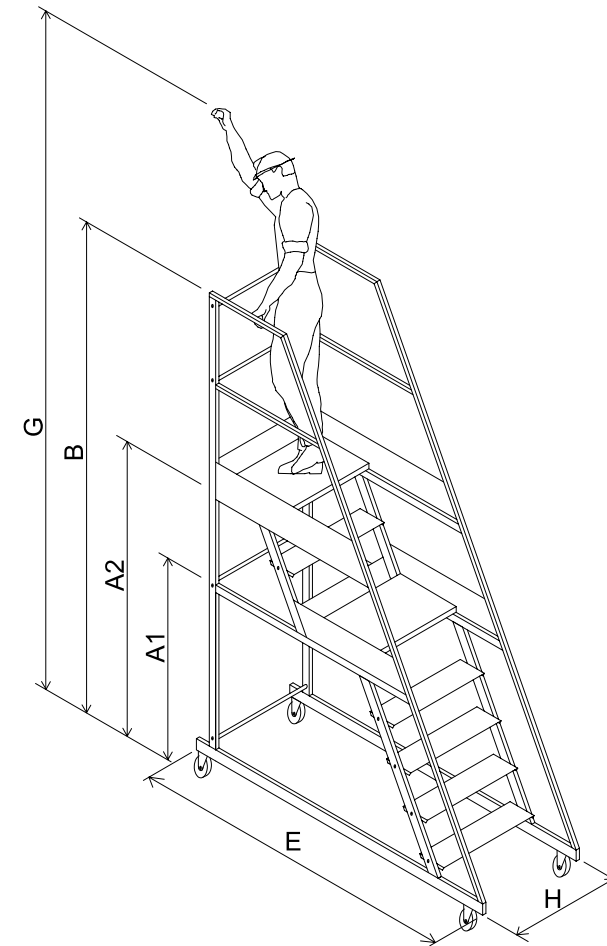

Codice	Gradini*	A1	A2	B	E	G	H	Peso
S2506	6	1000	1500	2500	1700	3350	700	35 kg
S2508	8	1500	2000	3000	1920	3850	700	45 kg
S2510	10	2000	2500	3500	2140	4350	700	55 kg
S2512	12	2500	3000	4000	2360	4850	700	65 kg

To optimize transport the ladder can be supplied disassembled

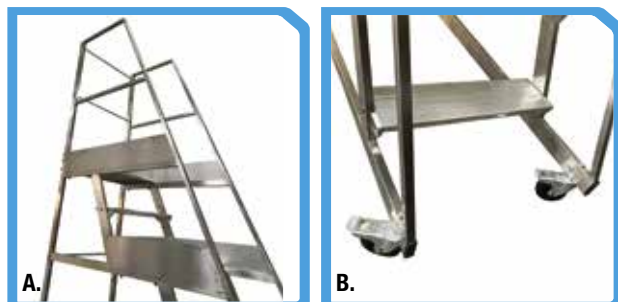

A. Double platform
B. Rotating wheels with brake lever

* The platforms are included in the number of the steps
Measures are in mm