



Description

The ladder has a trunk of climb and it is very solid. It has anodized aluminum frames and anti-slip steps. It is different from the standard model because it has deeper steps (150 mm). It is practical and durable and it provides to operator an excellent comfort. The ladder has a comfortable guard rail with height of 680 mm.

STEPS: they are mounted on aluminum die-casted supports with rungs and anti-torsion groove and they are fixed onto the frames.

WELD FREE AND RIVETING FREE


Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)
PLATFORM: aluminum 385x265 mm
STEPS: aluminum 150x23 mm
FRAMES: aluminum 65x30 mm
OBJECT HOLDER: aluminum 320x150 mm
HINGE JOINT: galvanized steel
TOP WIDTH: 380 mm
SAFETY STANDARD
D. Lgs. n° 81/2008

This model can also be supplied with handrail.




A. Different heights
B. Anti-opening tape
C. Guard rail

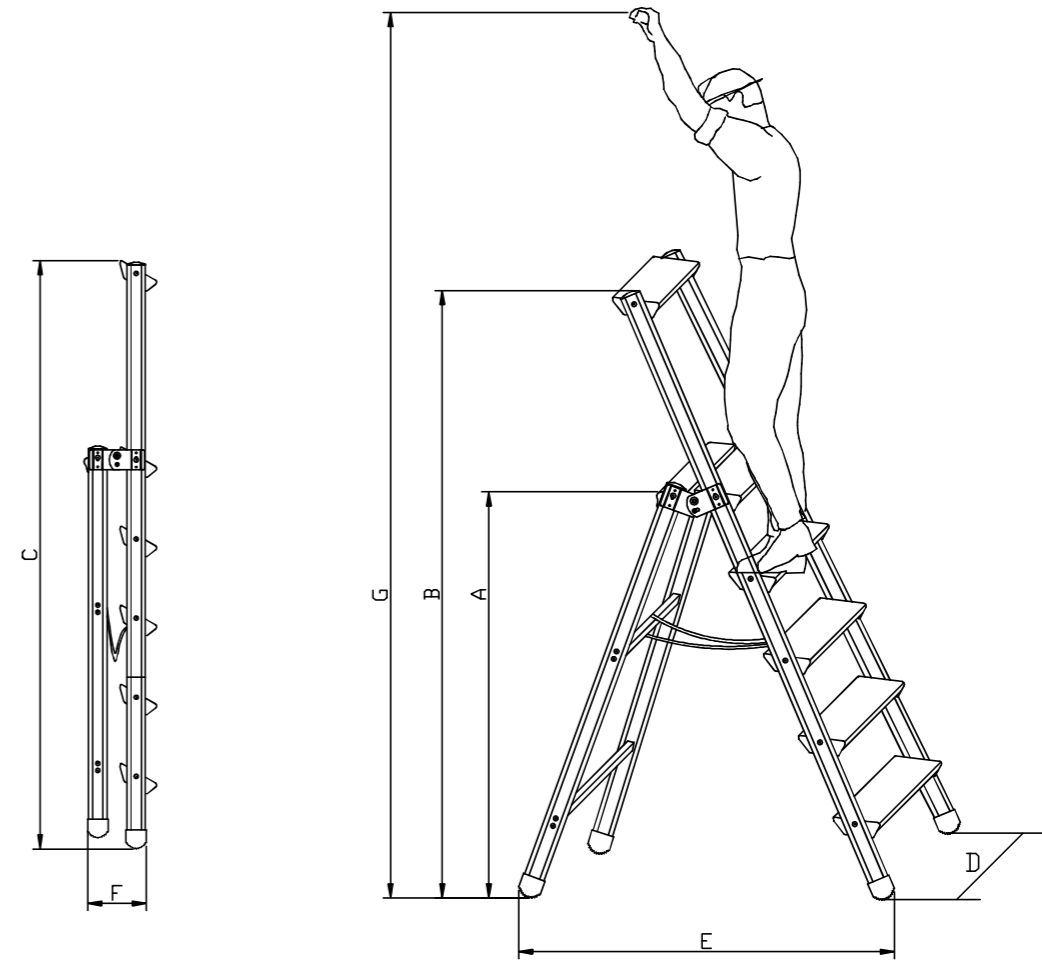

Code	Steps*	A	B	C	D	E	F	G	Weight
S1402	2	540	1170	1230	510	610	260	2350	10,4 kg
S1403	3	790	1420	1510	540	800	260	2630	11,6 kg
S1404	4	1040	1670	1790	570	990	260	2880	13 kg
S1405	5	1290	1920	2070	600	1180	260	3130	14,6kg
S1406	6	1540	2170	2350	630	1370	260	3390	16,8kg
S1407	7	1790	2420	2630	660	1580	260	3640	19kg
S1408	8	2040	2680	2910	690	1770	260	3890	21,4kg

* The platform is included in the number of steps - Measures are in mm

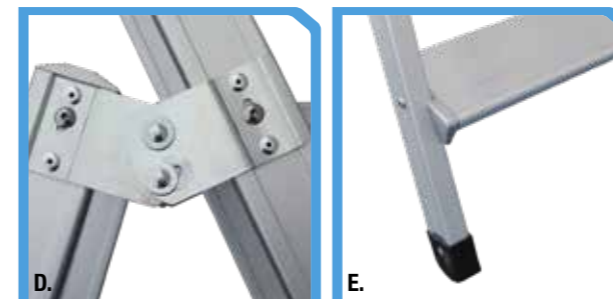

D. Anti-opening hinge joint
E. Anti-slip rubber caps