



Description

CCBS ladder with platform is made of stainless steel. The platform and the steps are in anti-slip aluminum. The ladder is provided with handrail.

To comply with European norms the ladder comes standard with lateral stabilizers which prevent the overturning of the ladder during use.

It is available in four versions:

- **CCBS/A** (photo A, from 4 to 13 steps): two rear fixed wheels and two rotating front wheels with spring.

- **CCBS/MA** (photo B, from 4 to 20 steps): two rear fixed wheels and two front steel handles (the two rotating wheels and the braking device are not included).

- **CCBS/P** (photo C, from 4 to 20 steps): two rear fixed wheels and a front braking device composed by two rotating wheels and a brake pedal.

- **CCBS/F** (photo D, from 4 to 20 steps): two rear fixed wheels and two rotating front wheels with brake lever.

WARNING: with this version the user must activate the brake pedal before using the ladder.

STEPS: they are mounted on aluminum die-casted supports with rungs and anti-torsion groove and they are fixed onto the frames.

WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg (weight related to a person with tools)

FRAMES: stainless steel (60x20 mm + 40x20 mm + 30x15 mm)

PLATFORM: anti-slip aluminum 490x490 mm


WHEELS: rear wheels ø 140 mm, front wheels ø 100 mm

STEPS: aluminum 150x23 mm

TOP WIDTH: 490 mm

SAFETY STANDARD:

UNI EN 131-2, UNI EN 131-7; D.Lgs n°81/2008 for: S1817A, S1818A, S1819A, S1820A.

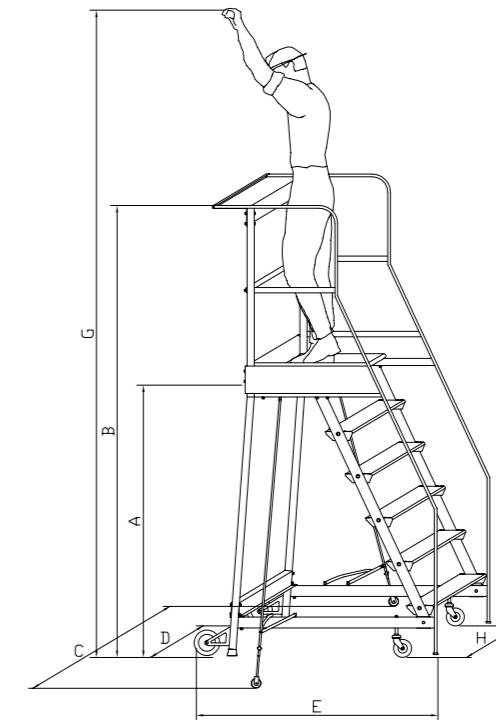

Code	Steps*	A	B	C	D	E	G	H	Weight
S1804A	4	1000	2000	1270	660	1090	2850	530	29,6 kg 34,2 kg**
S1805A	5	1250	2250	1270	690	1250	3100	550	32,9 kg 37,6 kg**
S1806A	6	1500	2500	1530	720	1350	3350	570	36,7 kg 41,4 kg**
S1807A	7	1750	2750	1530	750	1500	3600	590	40,8 kg 45,6 kg**
S1808A	8	2000	3000	1830	780	1650	3850	610	45,5 kg 50,2 kg**
S1809A	9	2250	3250	1830	810	1800	4100	630	50,3 kg 55,2 kg**
S1810A	10	2500	3500	2710	840	1950	4350	650	55,7 kg 61,6 kg**
S1811A	11	2750	3750	2710	870	2150	4600	670	62,4 kg 67,4 kg**
S1812A	12	3000	4000	3070	900	2300	4850	690	68,6 kg 73,6 kg**
S1813A	13	3250	4250	3070	930	2450	5100	710	75,1 kg 80,2 kg**
S1814A	14	3500	4500	3460	960	2600	5350	730	82,1 kg 87,2 kg**
S1815A	15	3750	4750	3460	990	2750	5600	750	89,4 kg 94,6 kg**
S1816A	16	4000	5000	3680	1020	2900	5850	770	97,2 kg 102,4 kg**
S1817A***	17	4250	5250	3900	1050	3050	6100	790	105 kg 110 kg**
S1818A***	18	4500	5500	4120	1080	3200	6350	810	113 kg 118 kg**
S1819A***	19	4750	5750	4340	1110	3350	6600	830	120 kg 126 kg**
S1820A***	20	5000	6000	4560	1140	3500	6850	850	128 kg 133 kg**

* The platform is included in the number of the steps - ** Weight of ladder with braking device - *** Complying with D.Lgs n° 81/2008 Measures are in mm

To optimize transport the ladder can be supplied disassembled


A. CCBS/A Version



B. CCBS/MA Version



C. CCBS/P Version



D. CCBS/F Version

